

Requirements

1 x 10 inch (20cm) square of OUTSIDE FABRIC

1 x 10 inch (20cm) square of INSIDE FABRIC

1 x 10 inch (20cm) square of NON-FUSIBLE INTERFACING for LINING

16 inches (41cm) ELASTIC for ears

Optional KAM Snaps and Tool

Sticky Tape

Pins


Sharp Scissors - or PINKING shears are even better

Iron

Prep Work

Cut out both pieces of your MASK PATTERN - but only the pattern, NOT the fabric OUTSIDE FABRIC - no cutting

INSIDE FABRIC - cut piece into 3.5×10 inches (9cm x 20cm) and 6.5×10 inches (11cm x 20cm) NON-FUSIBLE INTERFACING for LINING - trace all markings from pattern onto the centre of this piece ELASTIC - if stretchy cut 2×7 inches (18cm) but you will need to test this on your first mask

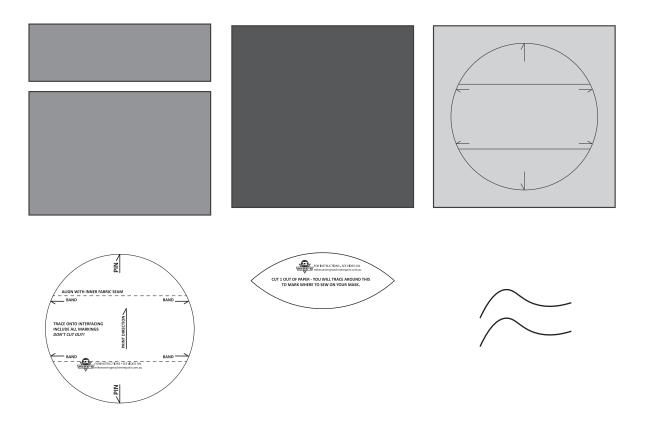

For sewing instructions please see our FREE video at: www.mikessewingmachinerepairs.com.au/video-gallery

